

**VOLUMETRIC PISTON PLASTIC REMOTE READING GALLON WATER METER
MODEL: PDSM-15S**



APPLICATION:

- ◆ Measuring the volume of cold potable water passing through the pipeline with remote reading device.

FEATURES:

- ◆ Completely plastic shell, solid and robust design, long service guaranteed.
- ◆ High quality materials fiberglass reinforced polymerization amine, corrosion resistance.
- ◆ Optimum accuracy and performance at all times, in any position.
- ◆ Revolutionary grooved piston for improved, durability and performance.
- ◆ Durable tamperproof construction.
- ◆ Volumetric meter, on principle of piston rotation, accurate measurement, easy and long term clear reading, etc.
- ◆ Great low flow accuracy.

DATA OUTPUT OPTIONS:

1 Pulse Per 5 Gallons

WORKING CONDITION:

- ◆ Water temperature: $\leq 120^{\circ}\text{F}$ (50°C)
- ◆ Water pressure: ≤ 150 psi (10bar)

MAXIMUM PERMISSIBLE ERROR:

NINGBO AIMEI METER MANUFACTURE CO., LTD.

Address: 68 Western Town Road Shangtian Town Fenghua City Zhejiang China-315511

Tel: +86-574-88637838

Fax: +86-574-88637968

Email: Aimei@chinaaimei.com

www.chinaaimei.com


- ◆ In the lower zone from q_{min} inclusive up to but excluding q_t is $-5\% \sim +1\%$
- ◆ In the upper zone from q_t inclusive up to and including q_s is $\pm 1.5\%$

ACCESSORIES:

Optional: Both brass connections and plastic connections are available.


MAIN TECHNICAL DATA:

Type	Size	q_s Max.Flow	q_p Nominal Flow	q_t Transitional Flow	q_{min} Min. Flow	Min.Reading	Max.Reading
		Gallon/minute				Gallon	
PDSM-15S	5/8" x 3/4"	20	15	1.0	0.25	0.1	99,999,999

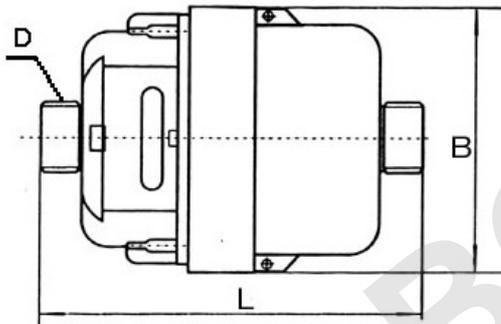


Type	Size	Length	Width	Connection Thread	Weight
PDSM-15S	5/8" x 3/4"	115	96	G1B	0.5kg

• 流量误差曲线 Flow Error Curve

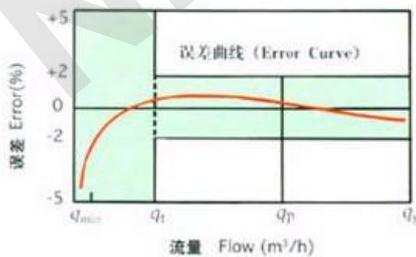

• 压力损失曲线 Head Loss Curve



NINGBO AIMEI METER MANUFACTURE CO., LTD.

Address: 68 Western Town Road Shangtian Town Fenghua City Zhejiang China-315511

Tel: +86-574-88637838

Fax: +86-574-88637968

Email: Aimei@chinaaimei.com

www.chinaaimei.com